

## 30kHz-40GHz DC Block



### Product Overview

AT-DC-29M29F is a broadband DC Block from 30kHz to 40GHz. The insertion loss is -1.2 dB with -15dB return loss performance

The RF1 and RF2 connectors are 2.92mm Female and Male respectively, other connector is available according to request. Input and output ports can be changed to use.

More information, please visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Advantages

- ✓ Frequency: 30kHz-40GHz
- ✓ Insertion Loss: -1.2dB
- ✓ Max Voltage: 16V
- ✓ Power Handling: +30dBm

### Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ Optical Application

### Key Features

Parameter	Min	Typical	Max
Frequency		30kHz-40GHz	
Insertion Loss		-1.2dB	-2.3dB
Return Loss	-10dB	-15dB	
Capacitance Value		220nF	
Group Delay		100ps	
Max Voltage			+16V
Power Handling			+30dBm





# AT-DC-29M29F

30kHz-40GHz DC Block

## Ordering

Part Number	Description
AT-DC-29M29F (Default)	RF1 2.92mm Female, RF2 2.92mm Male
AT-DC-29F29F	RF1 2.92mm Female, RF2 2.92mm Female
AT-DC-29M29M	RF1 2.92mm Male, RF2 2.92mm Male

## Mechanical Information

Item	Description
RF1 Port	2.92mm Female
RF2 Port	2.92mm Male
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	20g
Size:	27.4X14X5 mm

## Absolute Maximum Ratings Table


Parameter	Value
Voltage	+16V
RF Power	+30 dBm
Operating Temperature	-40 to +70C
Storage Temperature	-65 to +150C

## Notes:


1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



## Test Data

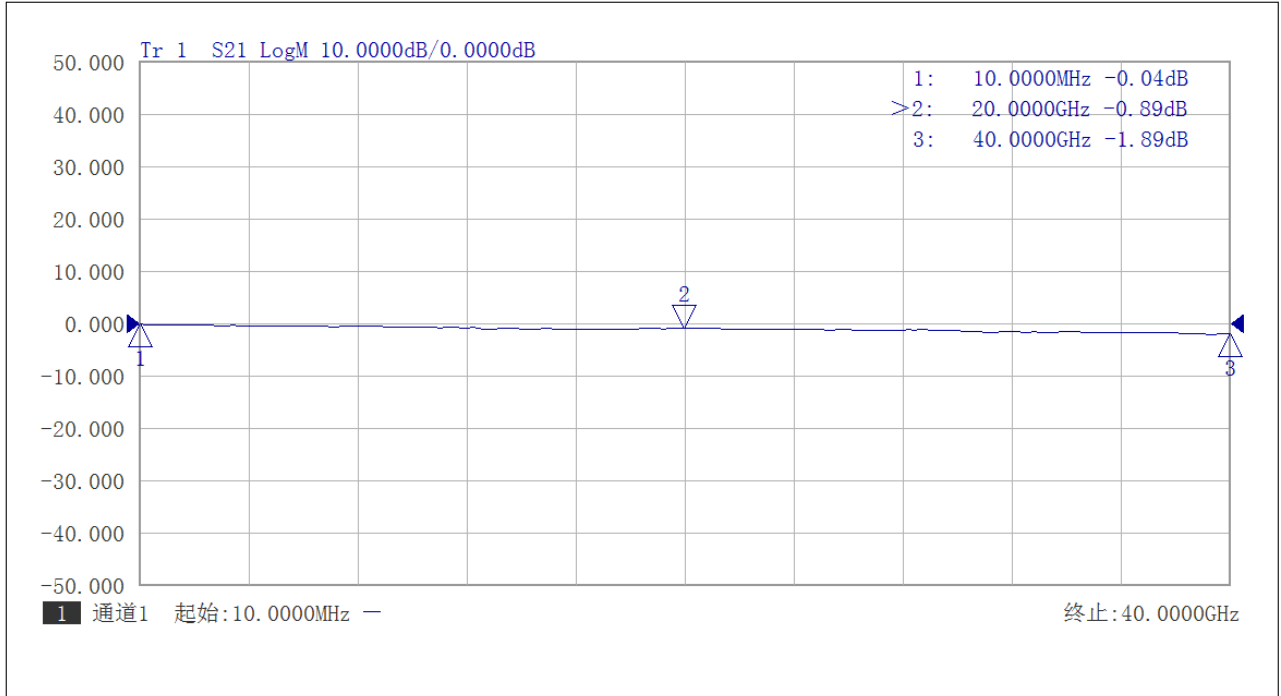


Insertion Loss vs Frequency

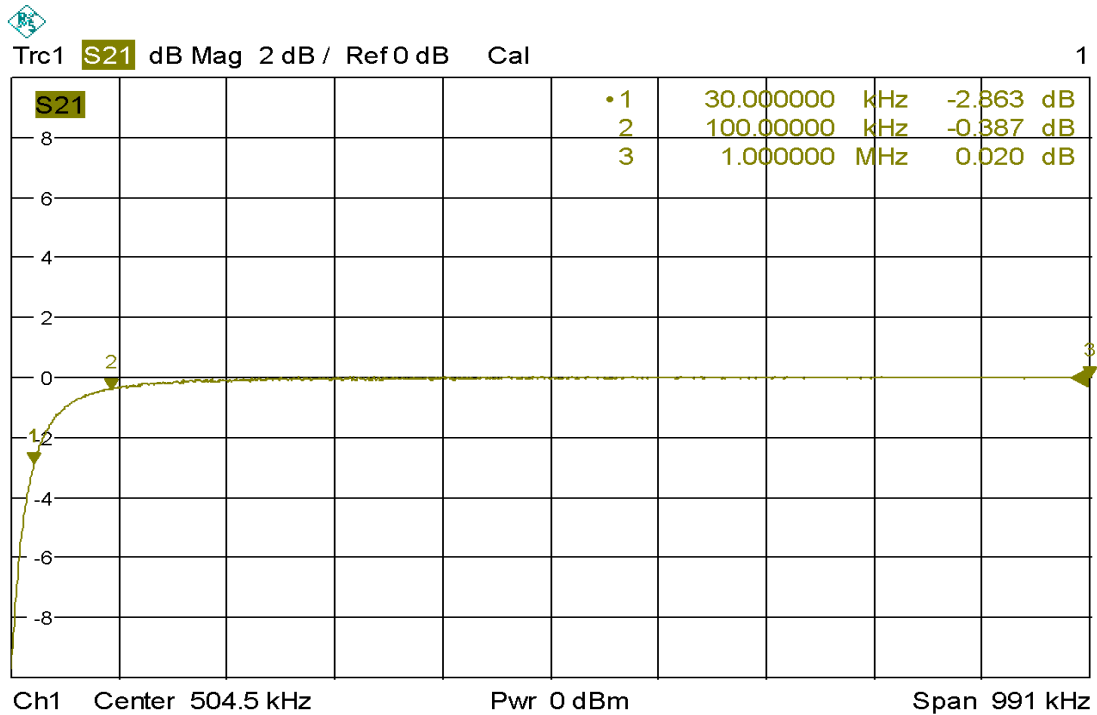


Low Frequency Insertion Loss



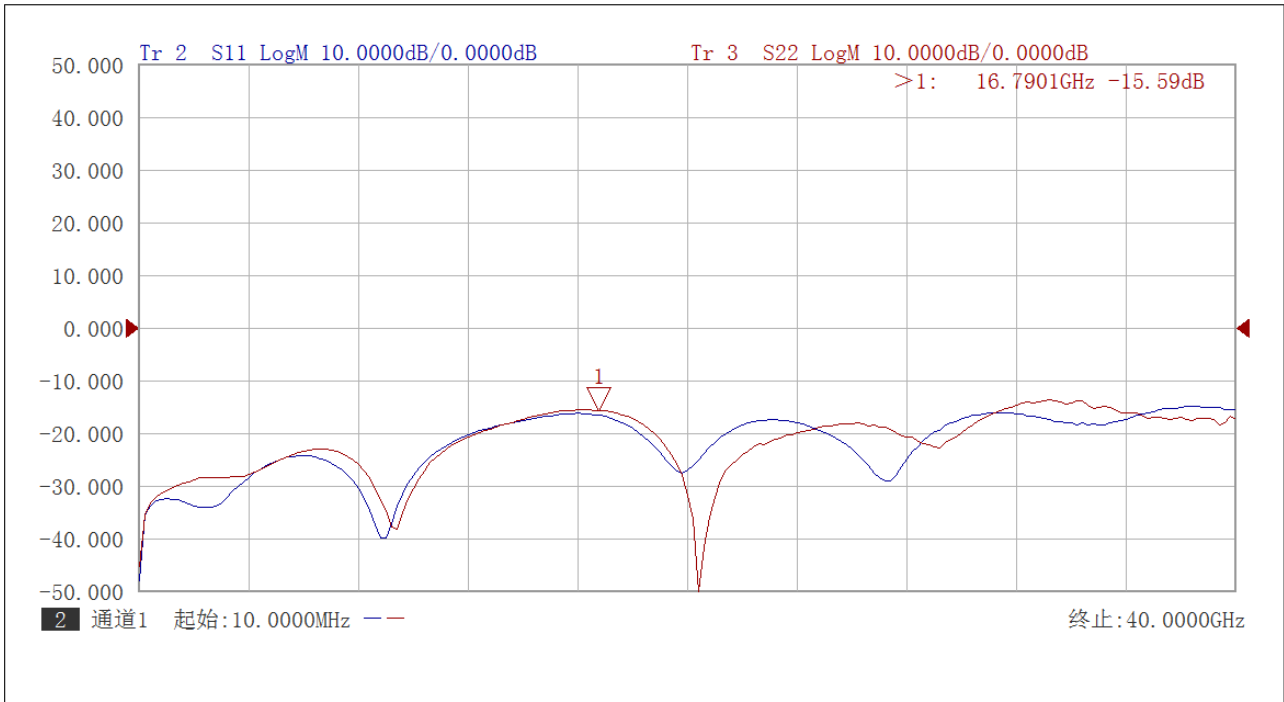


RF1 and RF2 Return Loss

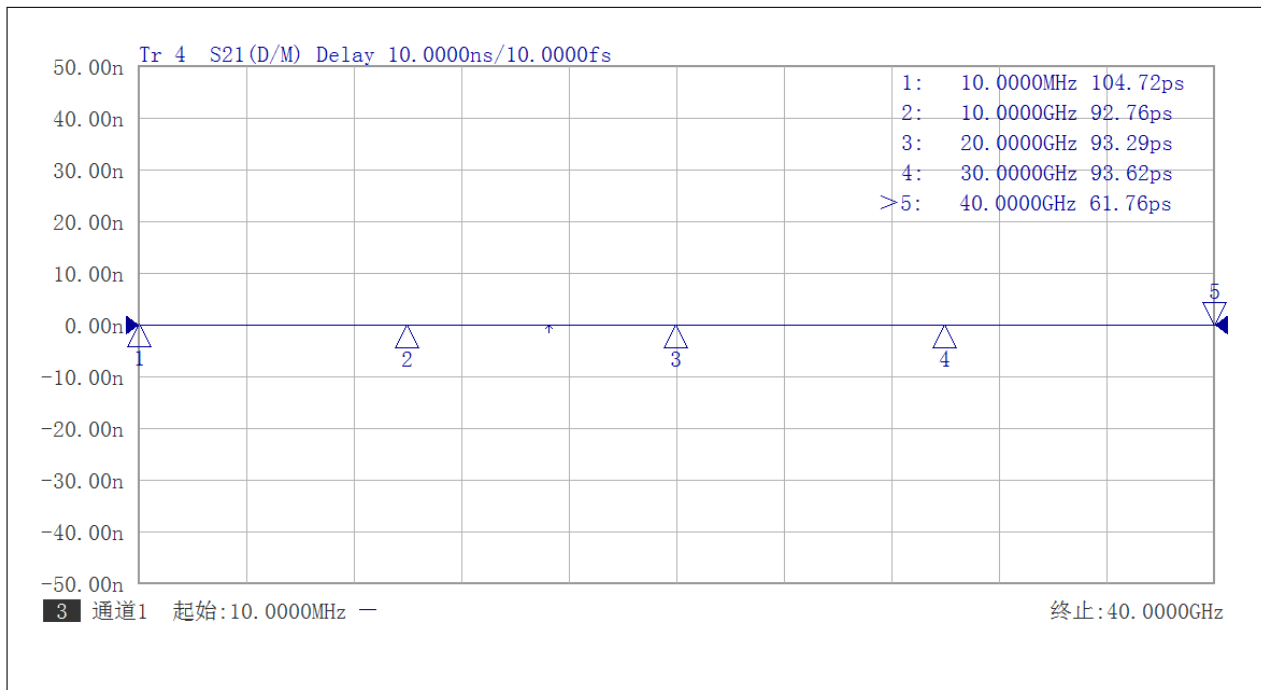

Group Delay vs Frequency



**Dimension:** (unit in mm)

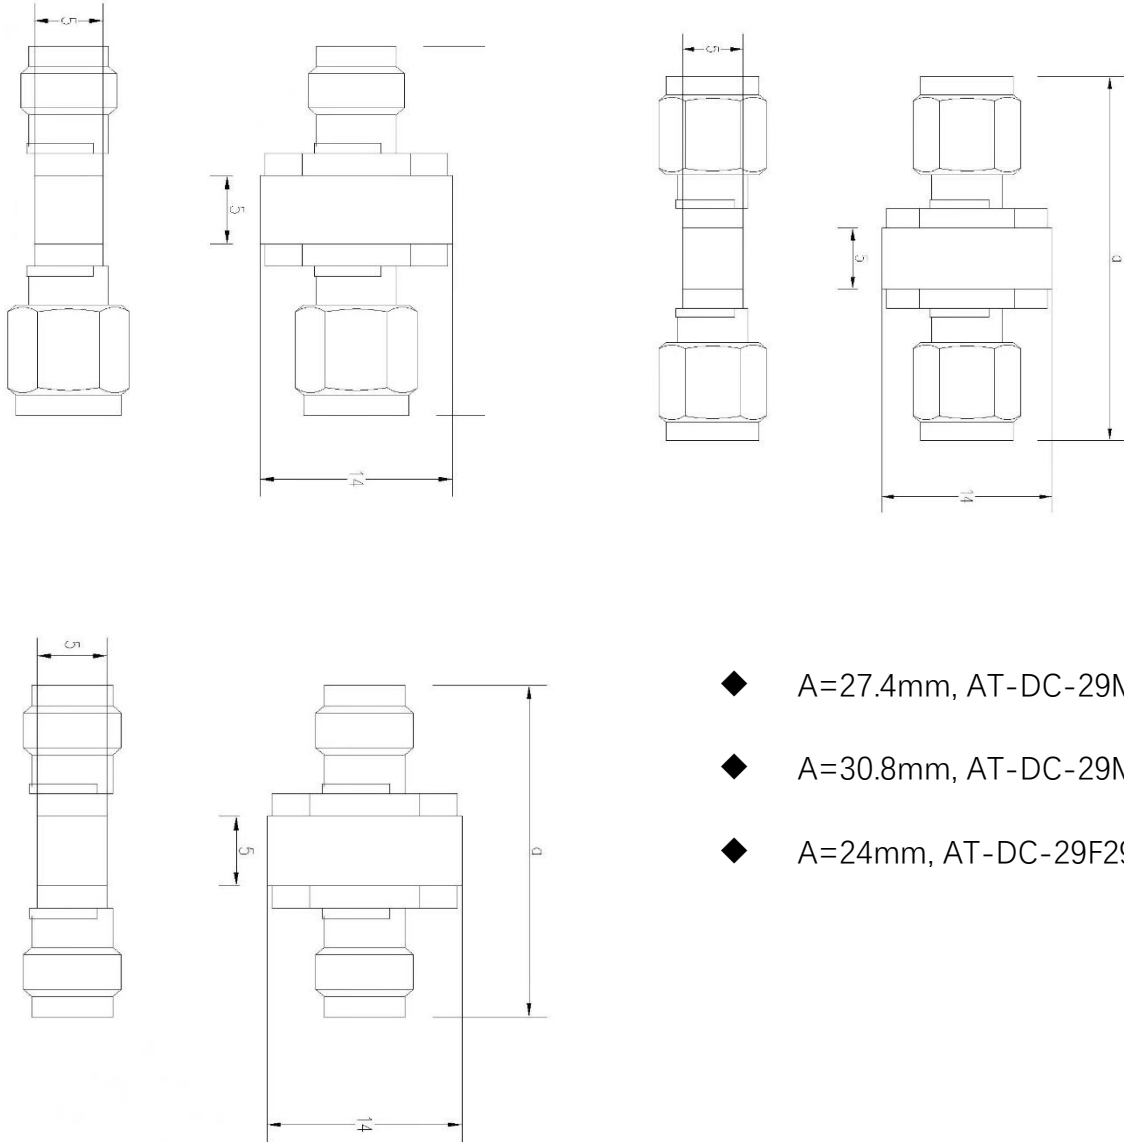

- ◆ A=27.4mm, AT-DC-29M29F
- ◆ A=30.8mm, AT-DC-29M29M
- ◆ A=24mm, AT-DC-29F29F

