


SL NO	SHELL SIZE	A	B
1	09	30.80	25.00
2	15	39.15	33.30
3	25	53.05	47.00
4	37	69.30	63.50

**NOTE :**

1. SHELL : PLATED STEEL
2. INSULATOR : THERMOPLASTIC (PBT)
3. CONTACT : COPPER ALLOY (GOLD PLATED)
4. CURRENT RATING : 7.5AMP
5. DIELECTRIC : 1000Vrms
6. INSULATION RESISTANCE : 1000MΩ Min (at 500V DC)

**PART NUMBER LOGIC**

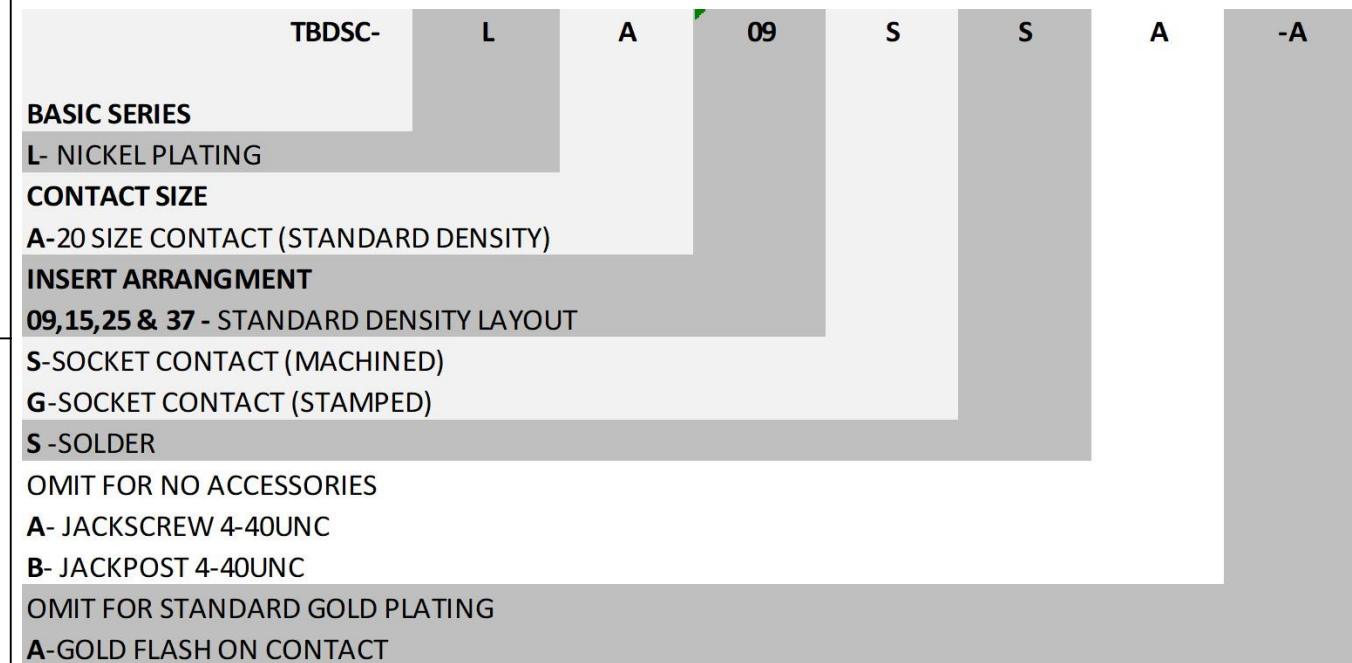

	MATERIAL:	---	UNLESS OTHERWISE NOTED:  <b>DIMENSIONS ARE IN MM :</b>  FRACTION ARE ± 1/16  .XX DECIMALS ARE ± .25 .XXX DECIMALS ARE ± .07  ANGLES ARE ± 2°  DO NOT SCALE THIS DRAWING	DESCRIPTION: DSUB RECEPTACLE CONNECTOR SOLDER TYPE STANDARD DENSITY
	SURFACE AREA:	---		
	EST. WEIGHT:	---		
	DRAWN:	MS	DRAWING NUMBER: CRD-TBDSC-LAXXSS	REVISION: 0
	CHECKED:	SSC		SHEET 1 OF 1
	APPROVED:	SSC		
	DATE:	25-01-2023		