


ET-ALF2762-CT-HD 27” Touch Panel

Features

- Compact and easy to integrate with mounting from sides or top and bottom; also a VESA mount option
- Optional touch technologies include: PCAP
- Worldwide agency approvals
- One year standard warranty

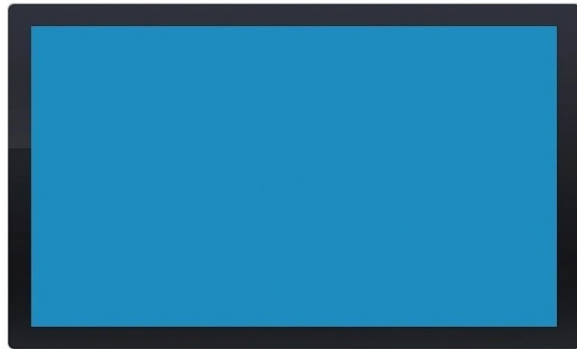

Applications

- Information Kiosk
- Game and Entertainment
- Industrial Automation
- Self-checking service



Specifications

Model	ET-ALF2762-CT-HD
Description	27"IP65 Open Frame PCAP Multitouch Touch Monitor
Case/Bezel Color	Steel/Black
Display	27inch Active matrix TFT LCD
Aspect Ratio	16:9
Optimal (native) Resolution	1920×1080 @60HZ
Useful Screen Area	597.6mm × 336.2mm
Colors	16.7 M
Brightness	300nits (500/1000/1500nits options)
Contrast Ratio	3000:1 (Typical)
I/O Ports	USB Touch, VGA, DVI, HDMI, Audio In, Earphone Out, 12V D/C in
Viewing Angle(CR≥10)	Horizontal: ±89° or 178° total; Vertical: ±89° or 178° total
Input Video Format	VGA, DVI, HDMI Option
Input Video Signal Connector	VGA, DVI, HDMI Option
On Screen Display	Controls (back):on/off, Menu, Left, Right, Auto
Backlight Lamp Life	50000 hrs
Touch Technology	Projected Capacitive Touch Technology, Ture 10-40points Multitouch
Response Time	3ms
Touch Resolution	32767×32767
Touch Glass	3mm Anti-vandal tempered glass meet IK07
Sealability	Touchscreen sealed to Aluminum alloy-bezel IP65
MTBF	50000 hrs demonstrated
Touch Interface	USB touch interface
Support OS	HID Mode: Windows 7/8/10/11, Linux, Android, Raspberry Pi, MAC, etc.
Mounting Options	VESA Mount (75mm or 100mm) , Side Mount or Front Mount with optional bracket
Power Supply	12V DC, (24V DC POE Option) External Adapter: 100-240VAC, 50-60Hz
Temperature Range	Operating: 0°C to 50°C; Storage: -20°C to 60°C
Humidity Range (no condensing)	Operating: 20%-80%; Storage: 10%-90%
Dimension and Weight	656 x 393 x 53.5mm
Warranty	1 year
Agency Approvals	CCC, FCC, CE, RoHS